



Structured Cable Products®

Quality Installations Deserve Quality Products


www.scpca5e.com
sales@scpcat5e.com
Direct: 954-327-5770
Toll Free: 866-470-5742

SCP PART#: 16/2OFC-HD-WT

UPC: 810070016425

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 2C/16 AWG 65 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE- 500 FT/152M BOX

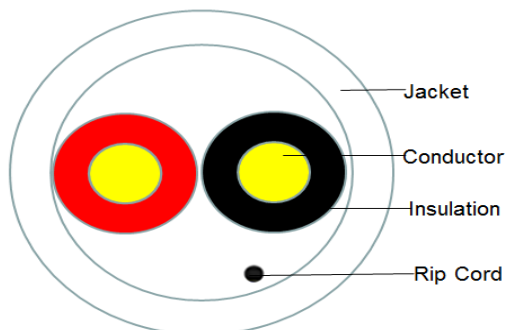

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Dca

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 2C(1.31mm ²)
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.0mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	6.25mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/95mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 15.5 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV



Structured Cable Products®

Quality Installations Deserve Quality Products

www.scpca5e.com
sales@scpcat5e.com
Direct: 954-327-5770
Toll Free: 866-470-5742

SCP PART#: 16/2OFC-HD-WT

UPC: 810070016425

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 2C/16 AWG 65 STRAND OXYGEN FREE COPPER, UL CMR, EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE- 500 FT/152M BOX

Impedance(near by):	85±5 Ω		
Capacitance(near by):	23±3pf/ft		
Marking:			
STRUCTURED CABLE PRODUCTS --- 16/2OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR 2C 16AWG 65 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca UV-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
8.3kgs/18.298lbs	320X260X320	500ft/Box	36
16.6kgs/36.596lbs	380X290X380	1000ft/Box	36