

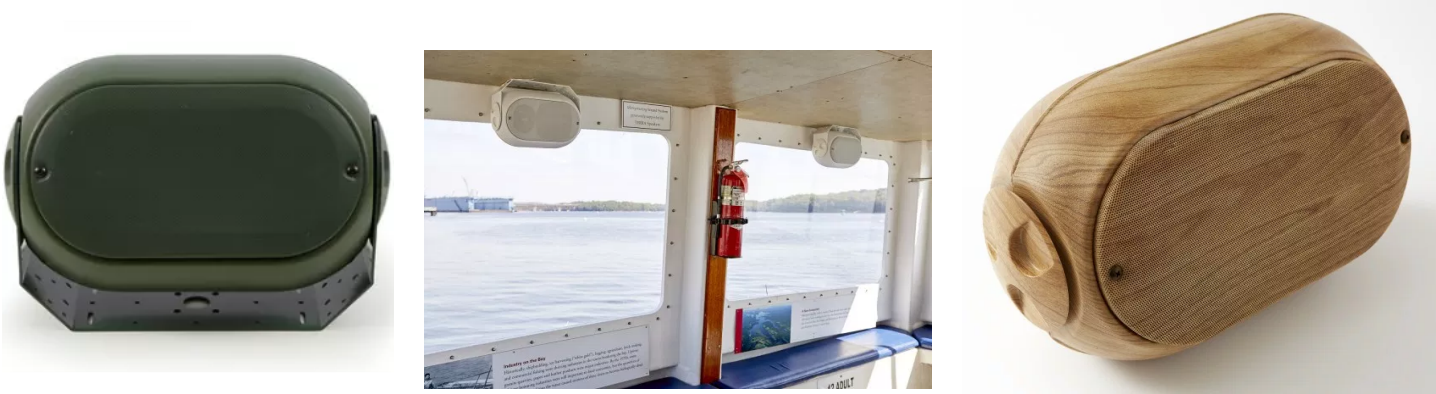


AC Classic 16 Specifications

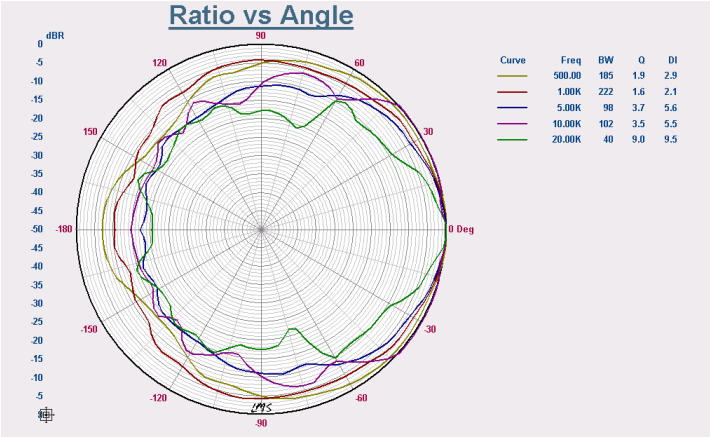

	AC 16e Specifications
Color Options	White, Black & Green*
Cabinet	UniCavity™ Enclosure
Bass/Mid Driver	6.5" [165mm] ACAD™ & MFCS™
Tweeter	1.1" [28mm] Inverted Dome Titanium Tweeter
Frequency Response	75 Hz to 22 KHz +/-3dB
Impedance	8 Ohms (70 Volt Available 8/16/32/64 Taps w/switch)
Power Handling	150 Watts Undistorted Power
Sensitivity	90dB (1 watt @1 meter)
Speaker Dimensions	15" [381mm] (H) x 9.25" [235mm] (W) x 8.5" (D)
Bracket	Aluminum "C" Bracket with EasyGrip Knob
Weight	12 lbs. [5.4] each
Weatherproof Rating	IP67 Meets or exceeds MIL-STD-810G standards
Temperature Range	-25° to 175° (-31c to 80c)

Specifications subject to change without notice due to product development
*Custom colors available by special order

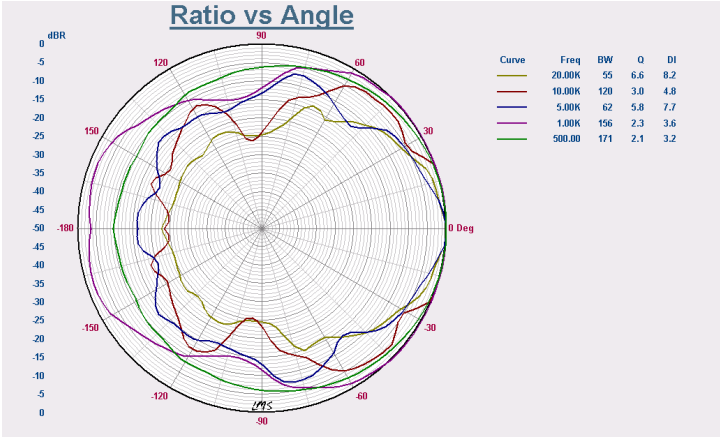

Cabinet Drawings

AC 16 Outline PDF

AC 16 Outline DXF



228 Old Portland Road, Suite #4 Brunswick, Maine 04011
Main: (207) 725-1005 | Fax: (207) 221-1186
TerraSpeakers.com