




1. DETERMINE LOCATION AND CUT 11.00 x 6.00 HOLE WITH 1/4 MAX RADIUS CORNERS IN TABLE TOP.

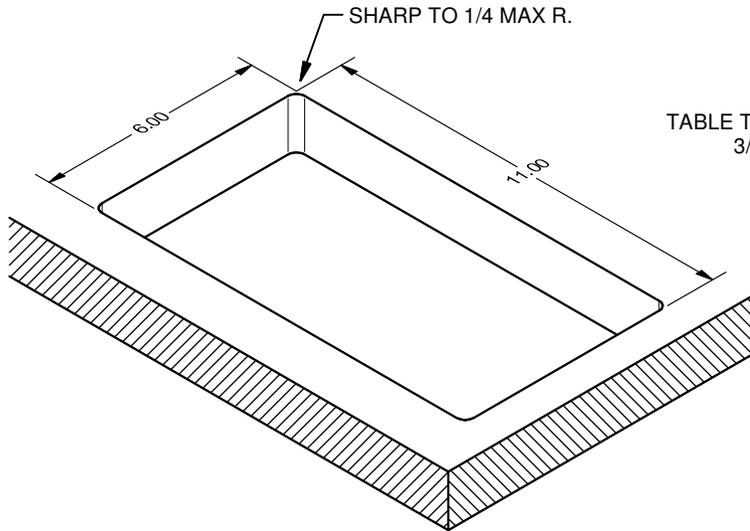

2. INSTALL DESIRED POWER UNITS/INTERNAL BRACKETS INTO RT6-RD4 ASSEMBLY. ADJUST HEIGHT OF UNITS/BRACKETS IN RT6-RD4 ASSEMBLY BEFORE INSTALLING IN THE TABLE. FOLLOW THE UNIT/BACKET INSTALLATION INSTRUCTIONS WHEN PROVIDED. IF RETRACTORS WILL BE INSTALLED, LEAVE THAT COMPARTMENT OPEN; RETRACTORS WILL BE ASSEMBLED LATER INTO A CASSETTE THEN INSTALLED FROM BOTTOM.

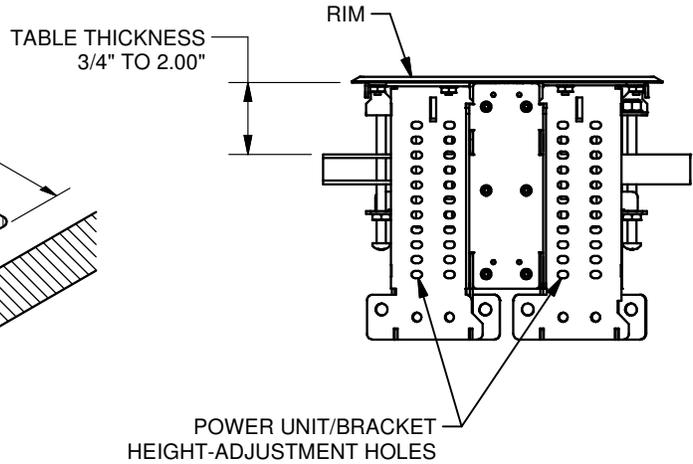

3. ROTATE LOCKING ARMS CLEAR OF TABLE AND INSERT RT6-RD4 ASSEMBLY INTO HOLE OF TABLE.

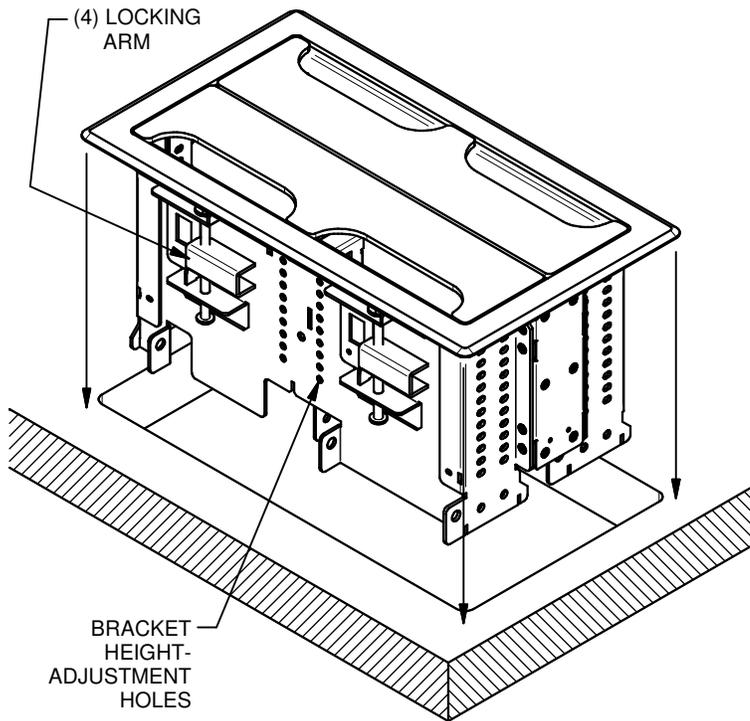

4. ROTATE LOCKING ARMS TO SECURE ASSEMBLY TO TABLE WITH ADJUSTMENT SCREW. LOCK ADJUSTMENT SCREW WITH INTEGRAL NUT WHERE NEEDED. MAKE ELECTRICAL CONNECTIONS AS REQUIRED.

