

Product family features

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Maestro®, Maestro IR®, Maestro Wireless®, Caséta® Wireless, Pico® wireless, Diva®, Skylark Contour® and Skylark® controls, and Claro® and Satin Colors® accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)
- Customize your designer wallplate with engraving. Contact customer service to get started; 1.888.LUTRON1


Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see p. 246
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, see pp. 250–252

Available finishes

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes

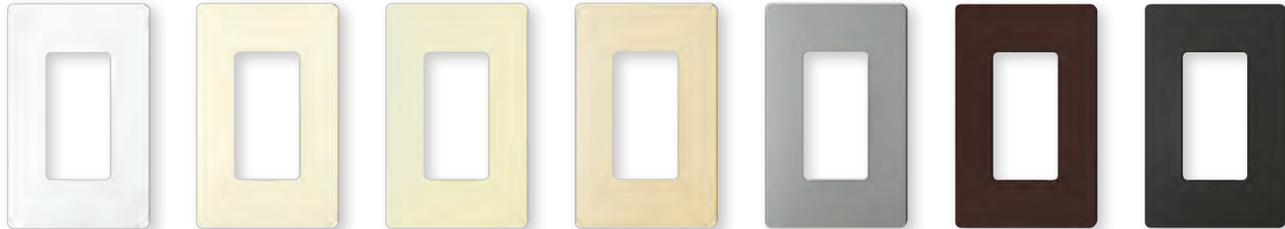

WH
White

LA
Light Almond

AL
Almond


IV
Ivory

GR
Gray

BR
Brown

BL
Black

Satin Colors® finishes

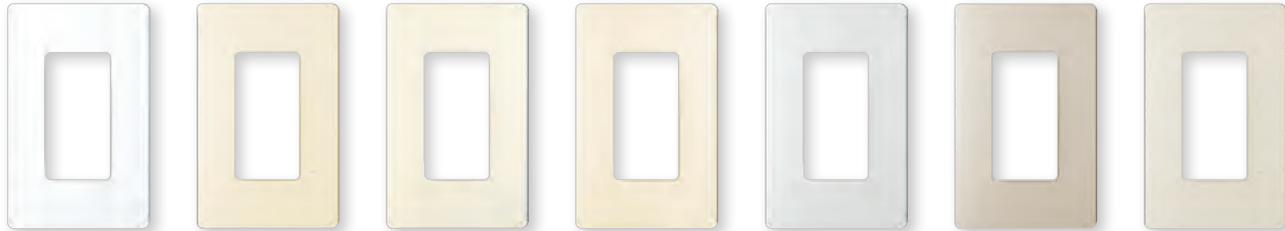

SW
Snow

LS
Limestone


BI
Biscuit

ES
Eggshell

PD
Palladium

TP
Taupe

ST
Stone

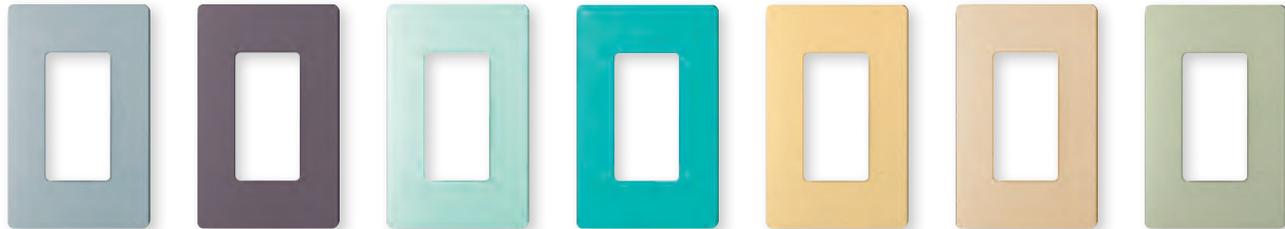

BG
Bluestone

PL
Plum

SG
Sea Glass


TQ
Turquoise

GS
Goldstone

DS
Desert Stone

GB
Greenbriar

Metal finishes*

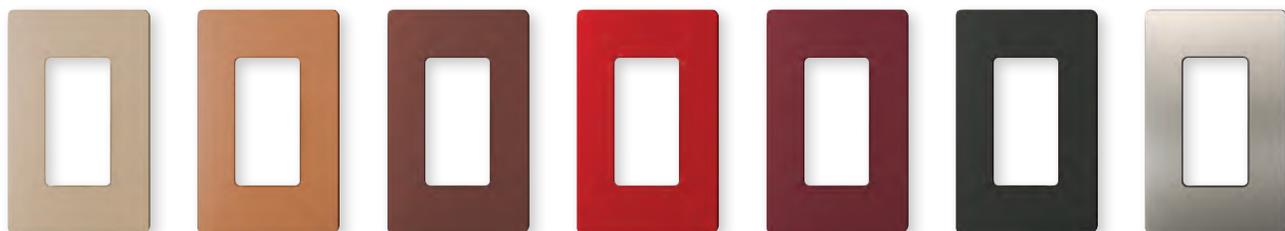

MS
Mocha Stone

TC
Terracotta

SI
Sienna

HT
Hot


MR
Merlot

MN
Midnight

SS
Stainless Steel

*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Caséta® Wireless, Pico® wireless, Diva®, Skylark Contour® and Skylark® controls, and Claro® and Satin Colors® accessories

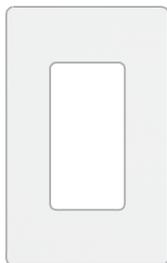

1-gang*

CW-1-**XX**¹
SC-1-**XX**²


W: 2.94 in (75 mm); H: 4.69 in (119 mm)
P: .30 in (7.6 mm)



4-gang*

CW-4-**XX**¹
SC-4-**XX**²


W: 8.37 in (213 mm); H: 4.69 in (119 mm);
P: .30 in (7.6 mm)

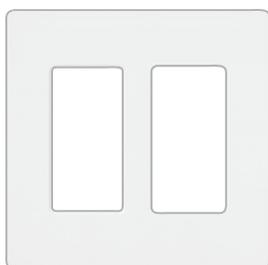

2-gang*

CW-2-**XX**¹
SC-2-**XX**²

W: 4.75 in (121 mm); H: 4.69 in (119 mm);
P: .30 in (7.6 mm)

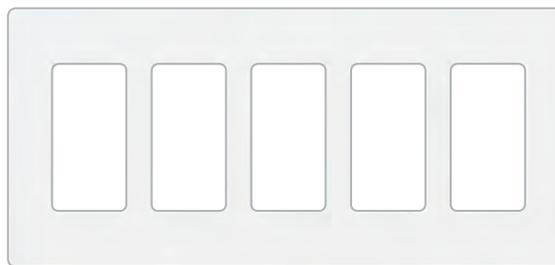

5-gang*

CW-5-**XX**¹
SC-5-**XX**²

W: 10.18 in (259 mm); H: 4.69 in (119 mm);
P: .30 in (7.6 mm)



3-gang*

CW-3-**XX**¹
SC-3-**XX**²


W: 6.56 in (167 mm); H: 4.69 in (119 mm);
P: .30 in (7.6 mm)

XX¹: Gloss and metal color codes,
see p. 235

XX²: Satin Colors® codes, see p. 235

Multi-gang dimmer installations may require derating, see pp. 250–252.

*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

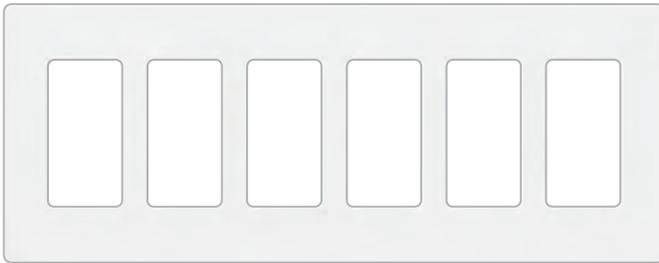


6-gang* CW-6-**XX**¹
SC-6-**XX**²

W: 12.00 in (305 mm); H: 4.69 in (119 mm);
P: .30 in (7.6 mm)

Important note

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox. For more information consult Lutron Application Note #213, Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box at www.lutron.com/applicationnotes.

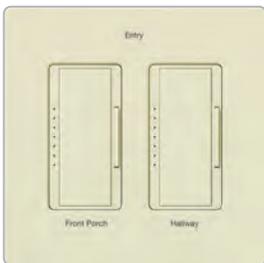

Custom engraving available for all New Architectural, Architectural, Designer and Traditional style wallplates (except Stainless Steel). For wallplate engraving schedules, go to www.lutron.com/engraving.

Multi-gang dimmer installations may require derating, see pp. 250–252.

* Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Cable jacks



- F-style, 75-Ohm coaxial cable
- Wallplate sold separately

Single cable jack CA-CJ-**XX**³
SC-CJ-**XX**²

Telephone jacks



- 6-conductor telephone jack, RJ11
- Wallplate sold separately

Single telephone jack CA-PJ-**XX**³
SC-PJ-**XX**²

XX¹: Gloss and metal color codes, see p. 235
XX²: Satin Colors® codes, see p. 235
XX³: Gloss color codes, see p. 235

6-port frame



- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

Field customizable 6-port frame

6-port frame	CA-6PF- XX ¹
	SC-6PF- XX ²

Connectors for 6-port frame



Telephone/network jacks

8-conductor, RJ45 category 3	CON-1P-C3- XX ³
8-conductor, RJ45 category 5e	CON-1P-C5E- XX ³
8-conductor, RJ45 category 6	CON-1P-C6- XX ³



Fiber jacks

MT-RJ feed through	CON-1F-MTRJ-WH
SC simplex	CON-1F-SC-WH
LC non-flush mount	CON-1F-LC-WH
ST-style	CON-1F-ST-WH



Cable jack

F-style, 75-Ohm coaxial cable	CON-1C- XX ³
-------------------------------	--------------------------------



BNC jack

BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

Receptacles



- Tamper resistant receptacles include tamper resistant shutter mechanism (shutters are white)
- Wallplate sold separately

Receptacles

15A 125V	CAR-15- XX ¹
15A 125V	SCR-15- XX ²
20A 125V	SCR-20- XX ²

Tamper-resistant receptacles

15A 125V	CARS-15-TR- XX ¹
15A 125V	SCRS-15-TR- XX ²
20A 125V	SCRS-20-TR- XX ²

USB receptacles



- Includes two USB ports
- Ports are rated for a minimum of 10,000 insertions and removals
- Includes 1-gang wallplate

Tamper-resistant USB receptacles

15A 125V	CAR-15-UBTR- XX ¹
15A 125V	SCR-15-UBTR- XX ²

XX¹: Gloss color codes, see p. 235
XX²: Satin Colors® codes, see p. 235
XX³: Available in White (WH) and Black (BL)

GFCI Receptacles



- Self-testing technology allows GFCI to automatically check proper operation every 30 seconds
- LEDs indicate status of GFCI protection function
- Press reset button to reset GFCI after circuit interruption
- Wallplate sold separately

Tamper-resistant, self-testing GFCI receptacles

15A 125V, GFCI	CAR-15-GFST- XX ¹
15A 125V, GFCI	SCR-15-GFST- XX ²
20A 125V, GFCI	SCR-20-GFST- XX ²

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plug for dimming table and floor lamps
- Tamper resistant shutter mechanism

Dual dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-DDTR- XX ¹
15A 120/125V	SCR-15-DDTR- XX ²
20A 120/125V	CAR-20-DDTR- XX ¹
20A 120/125V	SCR-20-DDTR- XX ²

Receptacles for half dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plug for dimming table and floor lamps
- Bottom half is a general use receptacle and will fit standard duplex plugs
- Tamper resistant shutter mechanism

Half dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-HDTR- XX ¹
15A 120/125V	SCR-15-HDTR- XX ²
20A 120/125V	CAR-20-HDTR- XX ¹
20A 120/125V	SCR-20-HDTR- XX ²

XX¹: Gloss color codes, see p. 235
XX²: Satin Colors® codes, see p. 235

Replacement plug for dimming



- This plug required for use with Lutron receptacles for dimming use—plug will also work in standard receptacle
- Easily replaces the existing plugs on lamps

Replacement dimming plugs

120/125V White	RP-FDU-10-WH
120/125V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

Important notes

- Receptacles and plugs for dimming use are UL listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For more information on dimming lamps consult Lutron Application Note #109, Guide to Dimming Portable Lamps via Receptacles, at www.lutron.com/applicationnotes.

Mechanical switches



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged
- Wallplate sold separately

General purpose switches

Single-pole 120/277V 15A	CA-1PS- XX ¹ SC-1PS- XX ²
3-way 120/277V 15A	CA-3PS- XX ¹ SC-3PS- XX ²
4-way 120/277V 15A	CA-4PS- XX ¹ SC-4PS- XX ²

General purpose switches with locator light

Single-pole 120V 15A	CA-1PSNL- XX ³ SC-1PSNL- XX ⁴
3-way 120V 15A	CA-3PSNL- XX ³ SC-3PSNL- XX ⁴
4-way 120V 15A	CA-4PSNL- XX ³ SC-4PSNL- XX ⁴

XX¹: Gloss color codes, see p. 235
XX²: Satin Colors® codes, see p. 235
XX³: Available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)
XX⁴: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

