



Scan for full manual

## KT-1010SC / KT-1010SCRB Quick Start Guide

This guide helps you install and use your KT-1010SC / KT-1010SCRB for the first time.

Go to [www.kramerav.com/downloads/KT-1010SC](http://www.kramerav.com/downloads/KT-1010SC) to download the latest user manual and check if firmware upgrades are available.

### Step 1: Check what's in the box


- ✓ KT-1010SC KronoMeet Touch Panel or KT-1010SCRB KronoMeet Touch Panel (Reduced Bandwidth)
- ✓ On-wall mount bracket

✓ 12V AC/DC power adapter
- ✓ Quick start guide

✓ Panel mount bracket
- ✓ 2 LED side bars

✓ Installation screws

### Step 2: Get to know your KT-1010SC / KT-1010SCRB

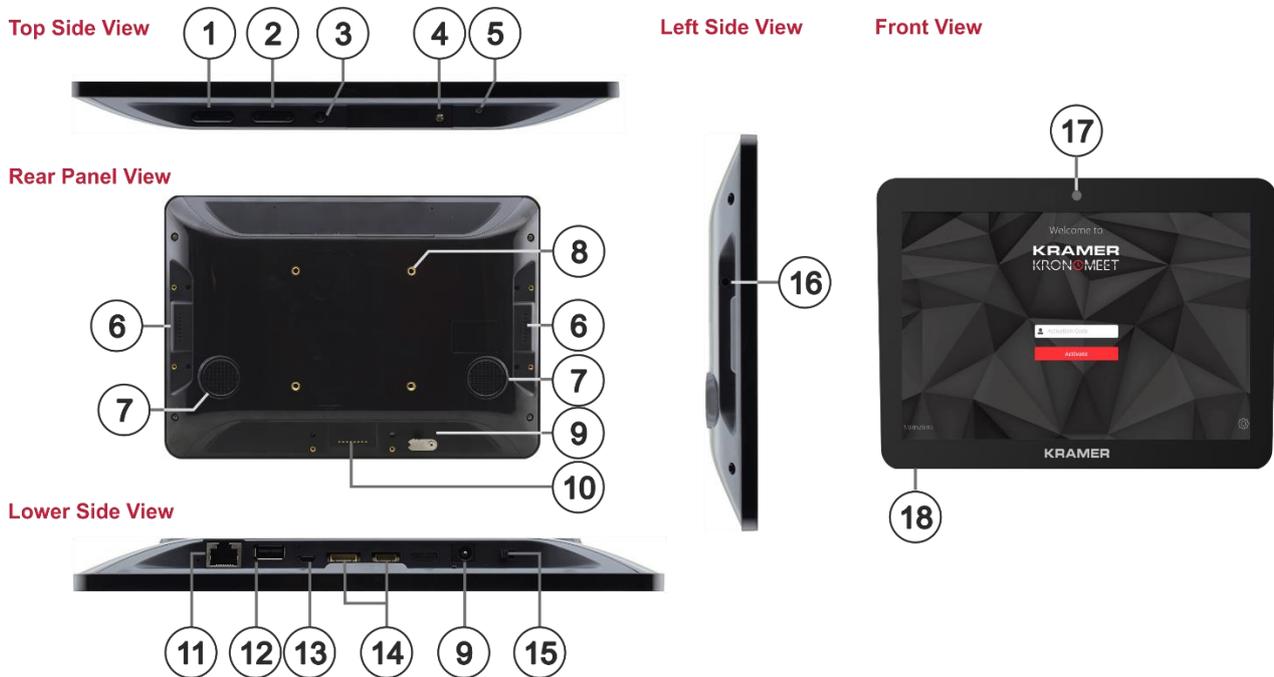


#	Feature	Function
1	Volume Buttons (+/-)	Press to increase/decrease <b>KT-1010SC</b> speaker volume.
2	Up/Down (Δ/▽) Keys	Press to scroll through the menu options.
3	Exit Button	Press to exit the menu.
4	SD Card Slot and Cover	Add an external memory card.
5	Power LED	Power on indication. Orange when loading, then turns green.
6	2 LED Side-Bar Module Slots	Connect to LED side bars to indicate the room status.
7	2 Speakers	To output the sound.
8	4 VESA Mounting Screw Holes (75x75mm)	Connect to a VESA kit to mount on a wall.
9	12V DC Input with Cable Security Lock	Connect to the AC/DC adapter and to the mains.
10	Add-on USB Module Slot	For future use.
11	Ethernet PoE RJ-45 Connector	Connect to a PC via a LAN.
12	USB Type A Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
13	Micro USB Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
14	2 Control I/O Ports	For future use.
15	Power ON/OFF Switch	Press to turn power on or off.

## Step 3: Mount KT-1010SC / KT-1010SCRB


Before mounting **KT-1010SC** on a wall, connect the two LED side bars to the LED module slots on both sides of the device and tighten to the rear side with the 2 screws (included with the side bars).

To mount **KT-1010SC** on a wall using the VESA kit:

1. Secure the on-wall mount to the wall using the installation screws.
2. Attach the panel mount bracket to the VESA mounting holes on the rear side of the **KT-1010SC**.
3. Slide the panel mount bracket to the on-wall bracket already mounted on the wall.

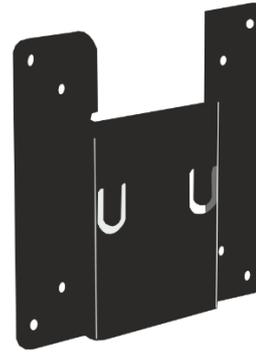

On-wall mount bracket



Panel mount bracket



- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.
- Maximum mounting height for the device is 2 meters.

## Step 4: Connect power

Connect the Ethernet port to a PoE Ethernet port, using a PoE-compliant Ethernet cable. Alternatively, or in addition to PoE powering, connect the power adapter to the 12V AC/DC power socket and to the main electricity.

Safety Instructions (See [www.kramerav.com](http://www.kramerav.com) for updated safety information).

### Caution:

- There are no operator serviceable parts inside the unit.

### Warning:

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

## Step 5: Operate KT-1010SC / KT-1010SCRB

To operate **KT-1010SC** for the first time:

1. Turn the power switch on the rear of the touch panel to ON. Wait for Kramer KronoMeet log-in page to load.
2. Press **Exit** (3) on the rear of the panel to exit the KronoMeet app.
3. Enter the default password (Kramer) and proceed to the Home Screen.
4. Make sure the device is connected to the Internet.

**i** If the device is connected via Wi-Fi:

- Press **Exit** (3) and enter the default password (Kramer).
- Click **Home Page>Settings>Wi-Fi** and choose your SSID Network.
- Reboot your device.

**i** KramerAppUpdate automatically updates Kramer apps. Tap **Home-Page>App Icon>KramerAppUpdate** to view installed and available app versions and to change the Server Check Interval.

To Launch the KronoMeet App and activate the KronoMeet panel:

1. Enter your KronoMeet Activation Code for this meeting space from the KronoMeet dashboard.
2. Click **Activate** on the panel.

