

CM-DC3 Flashing Tips



For Vehicles that do NOT Require CAN or Immobilizer/Bypass


FOLLOW THESE STEPS TO FLASH YOUR DC3 REMOTE START MODULE.



STEP 1:
Visit <https://compustar.idatalink.com>.
(Using Internet Explorer on a PC)




STEP 2:
Use the ADS Weblink cable to connect your DC3 module to your computer via the 4-pin **BLACK** port.

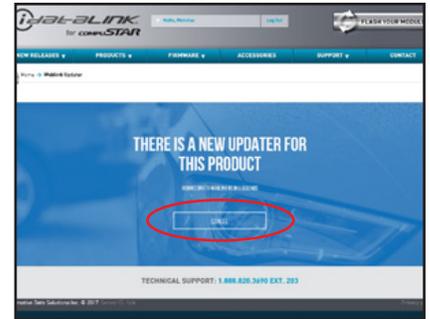

STEP 3:
Before you are redirected to the new flashing website, hit **CANCEL**. You must do this before the page refreshes.



STEP 4:
Select the “Flash by Firmware” tab and select RS-HCX. Proceed with flashing the DC3 module.

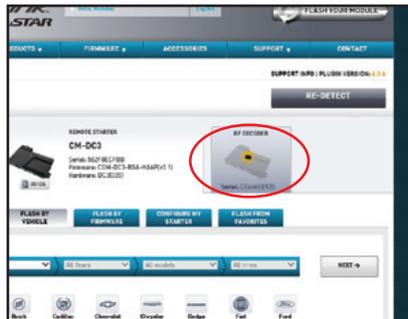

STEP 5:
Once you have flashed the DC3 module, click the upper secondary tab that says “RF DECODER” and complete the steps to update the built-in decoder.



STEP 6:
Cut the “loop” on the side of the module.

FINAL STEPS

- ✓ Learn the DC3 control module to the vehicle.
- ✓ Program tach. (Required on vehicles that provide tach through data or hardwired)
- ✓ Program remotes. Note: system must be unlocked/disarmed prior to entering programming mode.

