

Paging Horn Speaker

HS-20/20RT



HS-20



HS-20RT

FEATURES

- Excellent intelligibility & Loudness, High directivity, Good reliability
- Adjust direction : Vertical 240°, Horizontal 160°
- Linearity and high sound pressure
- Rugged durability and superior clarity
- Hand Speakers Easy Installation
- Dust / Water certified products (IP 65)
- Units are commonly installed in commercial buildings, distribution centers, factories, schools, public areas, civic centers and recreational facilities.

SPECIFICATIONS


	HS-20	HS-20RT
Rated Input	20W	20W
Impedance	500Ω (White) 1000Ω (Green)	500Ω (White) 1000Ω (Green)
Frequency response	380Hz ~ 6.5kHz	380Hz ~ 6kHz
SPL (1m/1W)	106dB	104dB
IP Rating	IP65	IP65
Operating Temperature	-45°C ~ +50°C	-45°C ~ +50°C
Weight	2.45kg	2.3kg
Dimensions(mm)	φ 250 x 280	250 x 197.5 x 310

* Design and specification are subject to be changed for the improvement of product quality without pre notice.




Polar Pattern Diagram

► HS-20

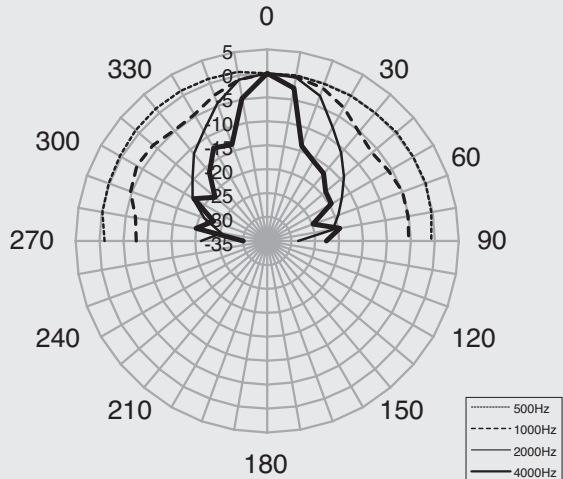


► HS-20RT

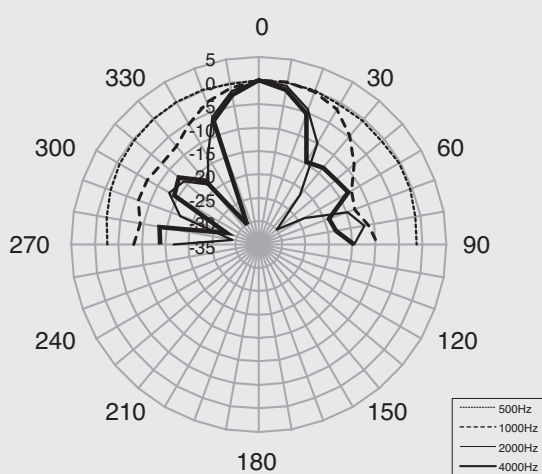

Frequency Response

► HS-20 SPL DATA

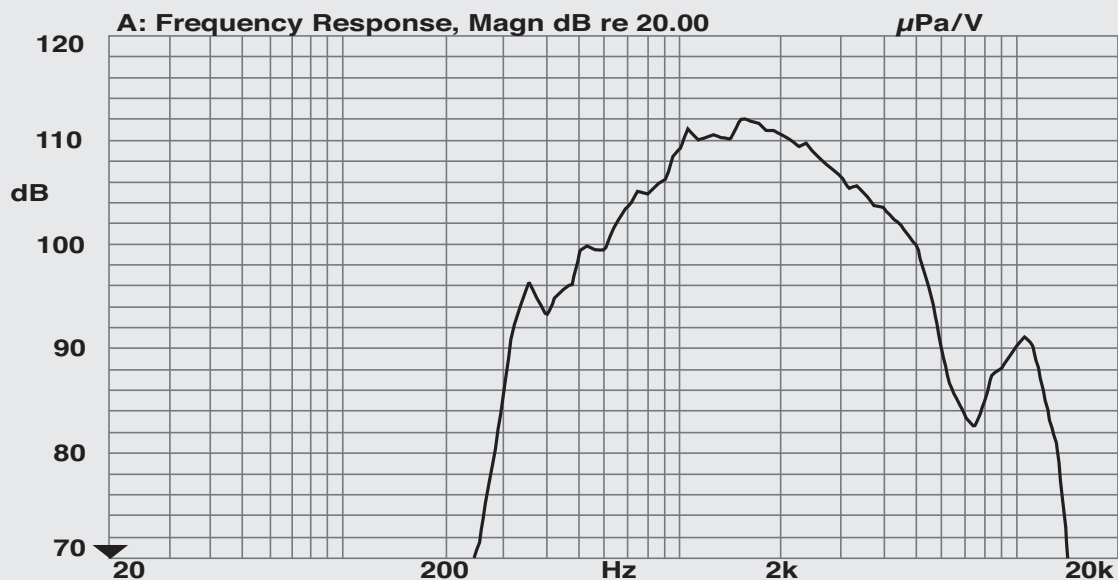

Inter-M Corporation

- Office : 653-5 BANGHAK-DONG, DOBONG-GU, SEOUL, KOREA
 - Tel : +82-2-2289-8140~8, Fax : +82-2-2289-8149
 - Home page: <http://www.inter-m.com>, E-mail: overseas@inter-m.com

Inter-M Corporation (USA)

- Office : 14730 E. FIRESTONE BLVD #312 LA MIRADA, CA 90638
 - Tel : +1-714-523-1870, Fax : +1-714-523-1882
 - Home Page : <http://www.inter-m.net>, E-mail : info@inter-m.net