

Paging Horn Speaker

HS-30/30RT



OVERVIEW

The HS-30/30RT is a double re-entrant loudspeaker which delivers 30-watts of continuous power handling.

The HS-30/30RT has operates within a nominal frequency response range of 380Hz to 6,5K Hz and offers a sensitivity of 107dB at 1 watt, 1 meter to provide clear voice intelligibility, signal communication and efficiency.

Robust weather-resistant aluminium construction and finished in grey epoxy for reliability both indoor and outdoor use.

FEATURES

- Excellent intelligibility & Loudness for Voice and Tone Signaling
- High directivity, Good reliability
- Environment Resistant for Outdoor and Indoor Use Grey Finish
- High-Efficiency Driver with Proven Performance
- Transformer Equipped for Versatile 25, 70.7, or 100V Line Applications

APPLICATION

Our technology can be found in schools, hospitals, malls, campus, transportation, correctional facilities, recreational facilities and a variety of commercial and industrial applications.

SPECIFICATIONS

Spec \ Model	Unit	HS-30	HS-30RT
Rated Input	W	30	30
Impedance	Ω	330, 660	330, 660
Frequency Response	Hz	380 ~ 6.5k	380 ~ 6.5k
70V watts	W	15 - 7.5	15 - 7.5
SPL (1W/m)	dB	107	107
IP Ratings	IP	54	54
Operating Temperature, Dust and Humidity	°C	-45 ~ 50	-45 ~ 50
	°F	-49 ~ 122	-49 ~ 122
Weight	kg	2.85	2.95
	lb	6.3	6.5
Dimensions (W×H×D)	mm	ø280x350	320x210x365
	inches	ø11x13.7	12.6x8.2x14.3


* Specifications and design are subject to change without notice.

HS-30/30RT




Polar Pattern Diagram

► HS-30

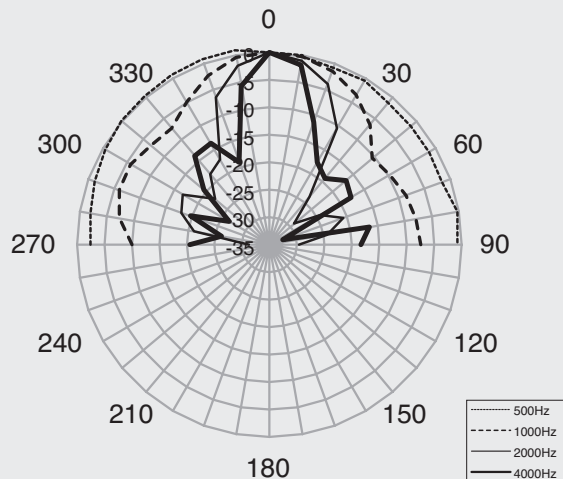


► HS-30RT

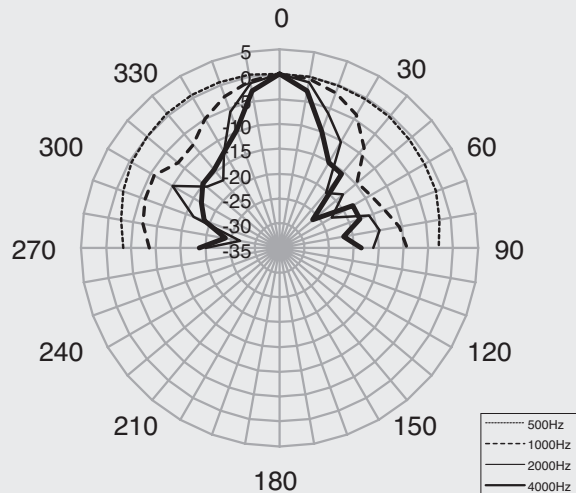


Frequency Response

► HS-30 SPL DATA

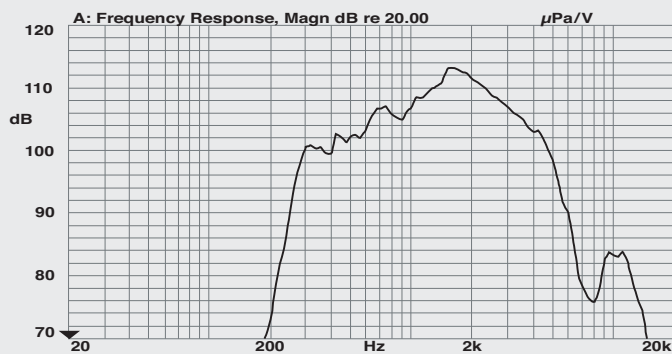

► HS-30RT SPL DATA

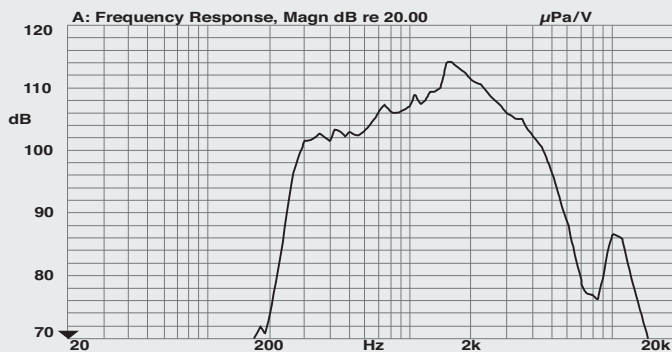

Inter-M Corporation

- Office : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
 - Tel : +82-2-2289-8140~8, Fax : +82-2-2289-8149
 - Home page: <http://www.inter-m.com>, E-mail: overseas@inter-m.com

Inter-M Corporation (USA)

- Office : 14730 E. FIRESTONE BLVD #312 LA MIRADA, CA 90638
 - Tel : +1-714-523-1870, Fax : +1-714-523-1882
 - Home Page : <http://www.inter-m.net>, E-mail : info@inter-m.net