



KRAMER

K-180Mini

Panocam 4K@30 lens 180-degree FOV fixed focus; 2 Mic AI-powered auto framing, face detection, touch-button, multi-display modes



Smart panoramic camera that keeps everyone in view
Get the full picture even in the smallest meeting room. This 4K wall-mount camera captures clear video across a full 180° field of view, ensuring even people sitting close to the camera and on the far sides of the room are clearly seen. It automatically recognizes and zooms in on meeting participants, follows speakers as they move around, and auto-adjusts when attendee numbers change

FEATURES

Immersive video conferencing experience -

Extreme wide-angle view, with three cameras providing a distortion-free 180° view that covers the whole room

Intelligent auto-framing and auto-tracking keep the presenter in focus

Easy and versatile operation -

Choice of 4 video layouts, with single-tap switching between them

Acts as a USB hub, enabling the K-Speak or any other speakerphone to be connected directly to the camera

Works with most common video conferencing platforms


Type-C Connection - Type-C connection enables seamless operation for a wide range of devices




KRAMER

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Ports | 1 USB 2.0 type A: On a USB connector |
| | 1 USB-C 2.0: On a USB-C connector |
| Video | Output Formats: MJPG; H.264; YUY2 |
| | Resolutions: YUY2 (30fps): 640x480, 640x360, 480x270, 352x288, 320x240 |
| | MJPG (30fps): 3840x2160(24fps), 3840x1376, 3840x962, 2560x1440, 1920x1080, 1280x720, 1024x576, 960x544, 640x480, 640x360 |
| | H264 (30fps): 1280x720, 1024x576, 960x544, 640x480, 640x360 |
| Focus | Method: Fixed |
| | Distance: 1.5 meters |
| Camera | Max. Field of View (FOV): 180 |
| | Depth of Field (DOF): 0.5 to 5 meters |
| | Aperture: 2.2 |
| | Minimum Illumination: 10Lux |
| Microphone | Quantity: 2 |
| | Pickup Distance: Up to 4 meters |
| Controls | Top Button: Selectable layouts |
| | App: Layout configuration via PC |
| Power | Consumption: 5V/950mA 4.7W |
| Environmental Conditions | Operating Temperature: 0° to +40°C (32° to 104°F) |
| | Storage Temperature: -20° to +60°C (-4° to 140°F) |
| | Humidity: 10% to 90%, RHL non-condensing |
| | Altitude: Below 5000 meters |
| Regulatory Compliance (Standards Compliance) | Safety: CE, FCC |
| | Environmental: RoHS, WEEE |
| Enclosure | Type: Aluminum |
| General | Net Dimensions (W, D, H): 14.7cm x 7.4cm x 3.5cm (5.8" x 2.9" x 1.4") |
| | Shipping Dimensions (W, D, H): 17.6cm x 17.6cm x 4.6cm (6.9" x 6.9" x 1.8") |
| | Net Weight: 0.24kg (0.53lbs) approx |
| | Shipping Weight: 0.59kg (1.3lbs) approx |
| Accessories | Included: 1 USB-C cable, wall bracket, and screws set |
| Product Dimensions | 14.70cm x 0.00cm x 3.50cm (5.79" x 0.00" x 1.38") W, D, H |
| Product Weight | 0.2kg (0.5lbs) approx |
| Shipping Dimensions | 17.60cm x 17.60cm x 4.60cm (6.93" x 6.93" x 1.81") W, D, H |
| Shipping Weight | 0.6kg (1.3lbs) approx |

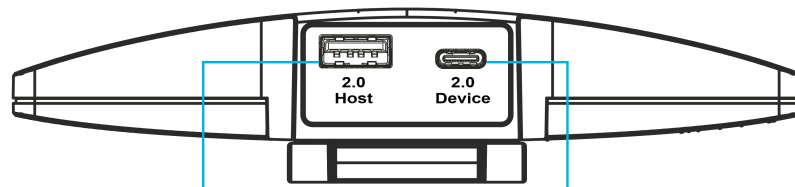

USB



Additional USB Device

USB



Control System