



Specifications for SB-HDWT

Supported Video	1080p, 1080i, 720p, 576p, 576i, 480p, 480i
HD port	Support for HDMI 1.3 audio format and encrypted video format HDCP 2.0
Transmission Distance	100ft (30m) Line of Sight
Operating Frequency	4.9 ~ 5.9Ghz
Bandwidth	40mhz
System latency	<1 ms
Antenna	Built in Omni-directional antennas
Power	Transmitter 100~240v AC power (7w/.14a@110v) Receiver 100~240v 5v 3a DC power adapter (7w/.14a@110v)
Transmitter Connectors	DC 5v In 2.5mm Jack for External IR Transmitter HD video in - 6 ft HD cable included
Receiver Connectors	AC in - 15 foot power cord HD video out - 15 ft HD cable included Built in IR receiver
Operating Temp.	-24° to 122° F. (-31° to 50° C.) *
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	6ft HD cable, 15ft HD cable, IR emitter, HDWT remote
Transmitter Dimension	6.6in H x 3.63in W x 1.0in D
Receiver Dimension	8.28in H x 9.5in W x 2.18in D
Shipping Box Dimension	11.5 in x 9 in x 5 in
Shipping Weight	5 lbs
Residential Warranty	One-year in-factory, parts and labor
Commercial Warranty	One-year parts and labor


Specifications are subject to change.

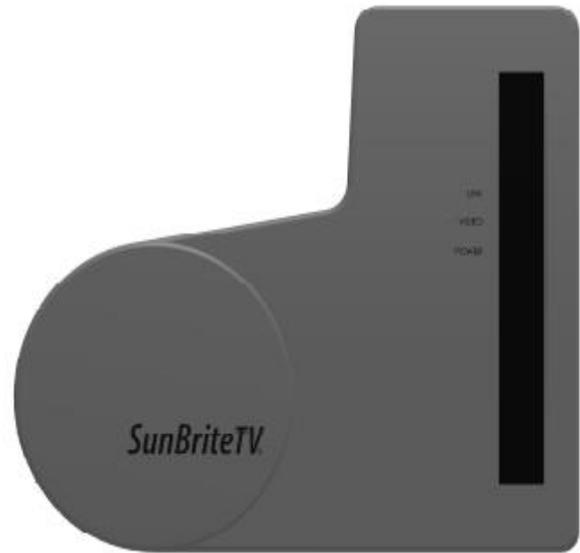

Receiver - Front View

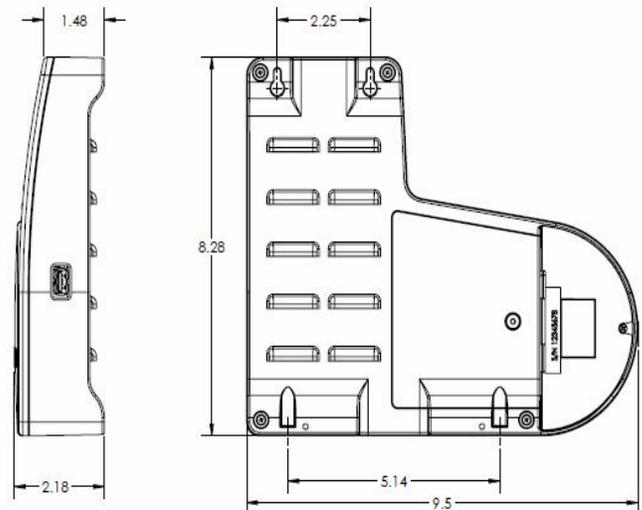

Receiver- Dimensions

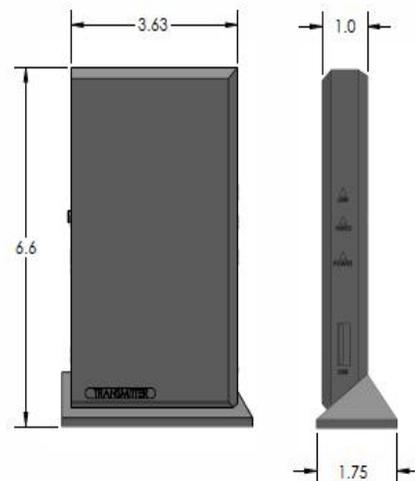

Transmitter - Dimensions