

Wall Mount and Patch Enclosure

Small, empty w/solid metal door, optional lock/key




Cleerline SSF™ wall mount fiber distribution units are designed to support patching and splicing in one unit. The enclosure has 2 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations, and the unit has a single outer door with optional key lock.



FEATURES AND BENEFITS

- Accommodates up to 2 adapter plates
- Cable entry tie down points
- Single door with optional key lock available
- Top or bottom cable entry
- LGX® compatible adapter plates

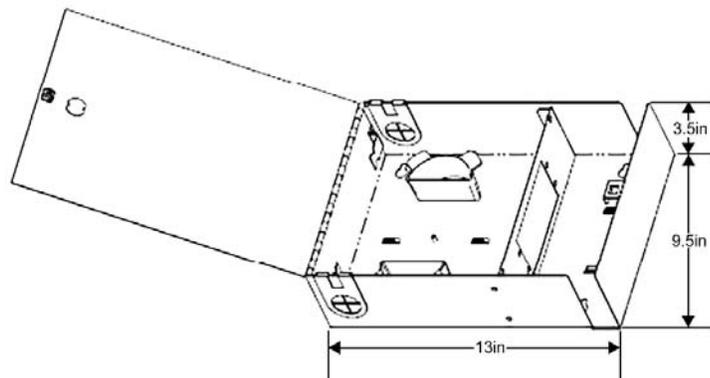

SPECIFICATIONS

Adapter Plates	2
Splice Trays	4
Dimensions	9.5" H x 13" W x 3.5" D
Packaging	10" H x 14" W x 4" D
Weight	7 lbs empty/10 lbs typical loaded
Material	18 GA Steel, Black powder coat
Compatible with	SSF™ adapter plates

PART NUMBERS

SSF-SWM-SOLID-NL-E2	Small, empty with solid metal door, no lock
SSF-SWM-SOLID-WL-E2	Small, empty with solid metal door, with one lock/key