



THINFIT LOUDSPEAKERS

SHALLOW DEPTH LOUDSPEAKERS

As audio installations have become more common, speakers are being placed in all types of environments. Sometimes, the requisite depth behind the drywall for a traditional in-wall or in-ceiling speaker does not exist. Our Thinfit Collection™ allows for speakers to be mounted in many of these locations.

PRODUCT ID



TF37EX



TF37DTEX



TFIW37EX

EASY FIT

Requiring only 1 ⁷/₁₆" (36mm) of mounting depth, these speakers can be easily installed in all but the most restrictive spaces.

INTEGRATE INTO ANY CEILING.

All of our Thinfit speakers mount with less than two inches of clearance, perfect for those oh-no moments when there's a surprise behind the drywall. The multiple woven glass-fiber woofers provide a surprising amount of low-end and volume, with the clarity and musicality you expect from Origin Acoustics. Available in three designs, two for ceiling applications and one D'Appolito model for in-wall use.

WOVEN GLASS-FIBER WOOFERS

1 ⁷/₁₆" (36MM)



THINFIT LOUDSPEAKERS

SPECIFICATIONS

TF37EX

Part	STF3700EX
Tweeter Diameter)	3/4" (20mm)
Tweeter Dome	Aluminum
Woofer Diameter	Quad 3 1/2" (89mm)
Woofer Cone	Glass Fiber
Frequency Response	120Hz - 20kHz
Recommended Amp	30 watts - 100 watts
Nominal Impedance	6 Ω minimum
Mounting Depth	1 7/16" (36mm)
Diameter	9 5/8" (244mm)
Cutout Diameter	8 3/4" (222mm)
Grille Diameter	10" (254mm)

SPECIFICATIONS

TF37DTEX

Part	STF3700DTEX
Tweeter Diameter)	Dual 3/4" (20mm)
Tweeter Dome	Aluminum
Woofer Diameter	Dual 3 1/2" (89mm)
Woofer Cone	Glass Fiber
Frequency Response	120Hz - 20kHz
Recommended Amp	20 watts - 50 watts
Nominal Impedance	6 Ω minimum /channel
Mounting Depth	1 7/16" (36mm)
Diameter	9 5/8" (244mm)
Cutout Diameter	8 3/4" (222mm)
Grille Diameter	10" (254mm)

SPECIFICATIONS


TFIW37EX

Part	STFIW3700EX
Tweeter Diameter)	3/4" (20mm)
Tweeter Dome	Aluminum
Woofer Diameter	Quad 3 1/2" (89mm)
Woofer Cone	Glass Fiber
Frequency Response	90Hz - 20kHz
Recommended Amp	30 watts - 100 watts
Nominal Impedance	6 Ω minimum
Mounting Depth	1 7/16" (36mm)
Dimensions	5 1/2 x 17 1/2 x 1 7/16" (140 x 440 x 36mm)
Cutout Dimensions	4 9/16 x 16 3/8" (116 x 416mm)
Grille Dimensions	6 x 18" (152 x 452mm)




THINFIT LOUDSPEAKERS

LINE DRAWINGS

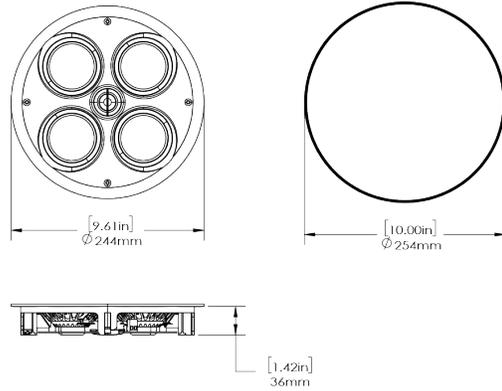

TF37EX

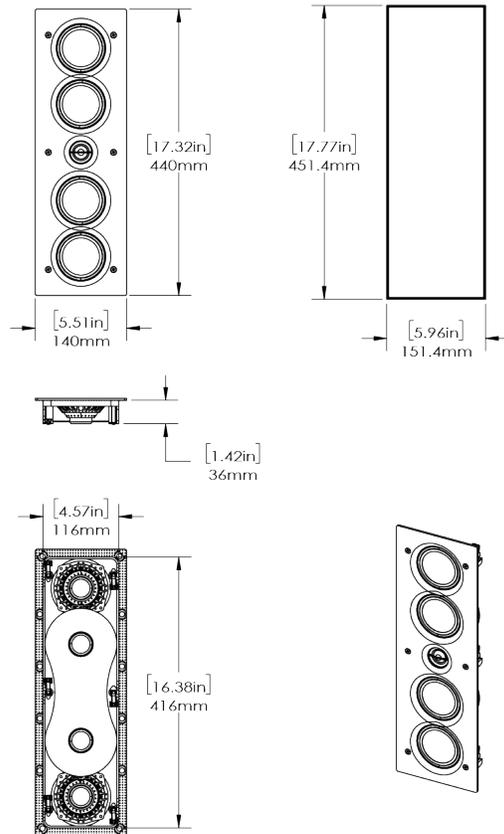


TFIW37EX

Please see originacoustics.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.



THINFIT LOUDSPEAKERS

LINE DRAWINGS

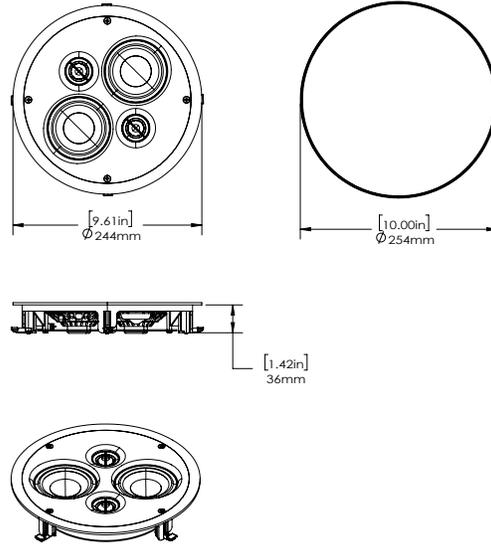

TF37DTEX

Please see originacoustics.com for most the most updated information concerning these specifications. Products may only be purchased through an authorized integration partner.