

SunBrite

True Outdoor Television

Veranda Series

Technical Specifications

Model SB-V-43-4KHDR

Model SB-V-55-4KHDR


Model SB-V-65-4KHDR

Model SB-V-75-4KHDR

Specifications

SunBriteTV Model SB-V-43-4KHDR


LCD Screen	43-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k HDR
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	400 nits (cd/m2)
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	8 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x3 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2) (ARC on HDMI2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
RGB	VGA DB15hd (up to 1920 x 1080)
Control Set	Discrete IR Control, Concealed rear IR receiver, IP Control
Audio Out	Tos-Link Optical audio (Fixed) Analog 3.5mm (variable)
Speakers	20 Watt downfiring internal speakers or optional speaker bar (not included)
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (75 watts/.7a@120v)
Operating Temp.	-24° to 104° F. (0° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery
TV Dimensions	39" W x 23" H x 3.4" D 991mm W x 584mm H x 86mm D
TV Weight	30 lbs.(13.6 kgs)
Shipping Weight	40 lbs. (18.14 kgs)
Residential Warranty	1 year
Commercial Warranty	1 year
Vesa Mount Pattern	200mm x 200mm

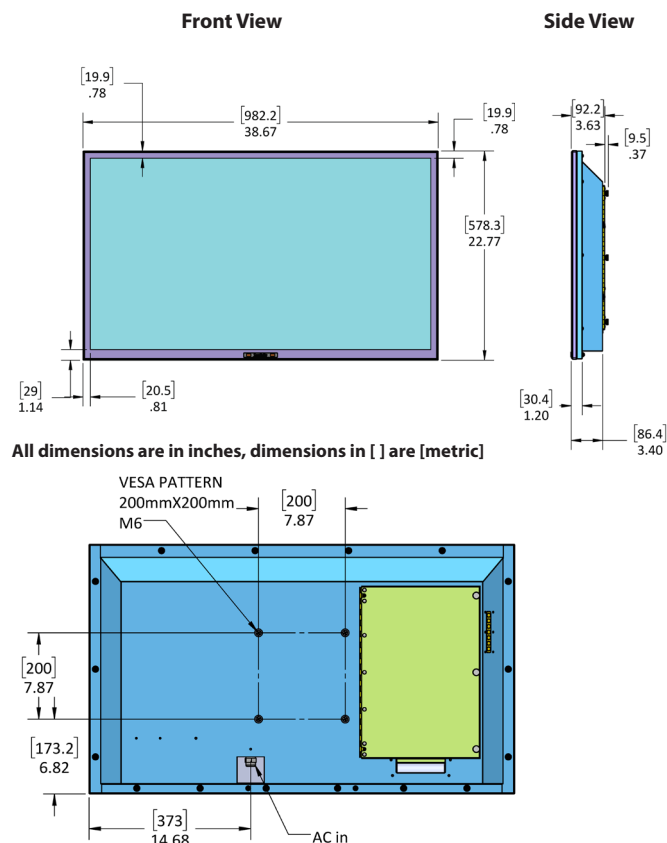

Specifications

SunBriteTV Model SB-V-55-4KHDR

LCD Screen	55-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k HDR
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	400 nits (cd/m2)
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	8 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x3 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2) (ARC on HDMI2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
RGB	VGA DB15hd (up to 1920 x 1080)
Control Set	Discrete IR Control, Concealed rear IR receiver, IP Control
Audio Out	Tos-Link Optical audio (Fixed) Analog 3.5mm (variable)
Speakers	20 Watt downfiring internal speakers or optional speaker bar (not included)
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (125 watts/1.0a@120v)
Operating Temp.	-24° to 104° F. (0° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery
TV Dimensions	49.4" W x 28.6" H x 3.4" D 1254mm W x 726mm H x 86mm D
TV Weight	47 lbs.(21.3 kgs)
Shipping Weight	63 lbs. (28.5 kgs)
Residential Warranty	1 year
Commercial Warranty	1 year
Vesa Mount Pattern	400mm x 400mm

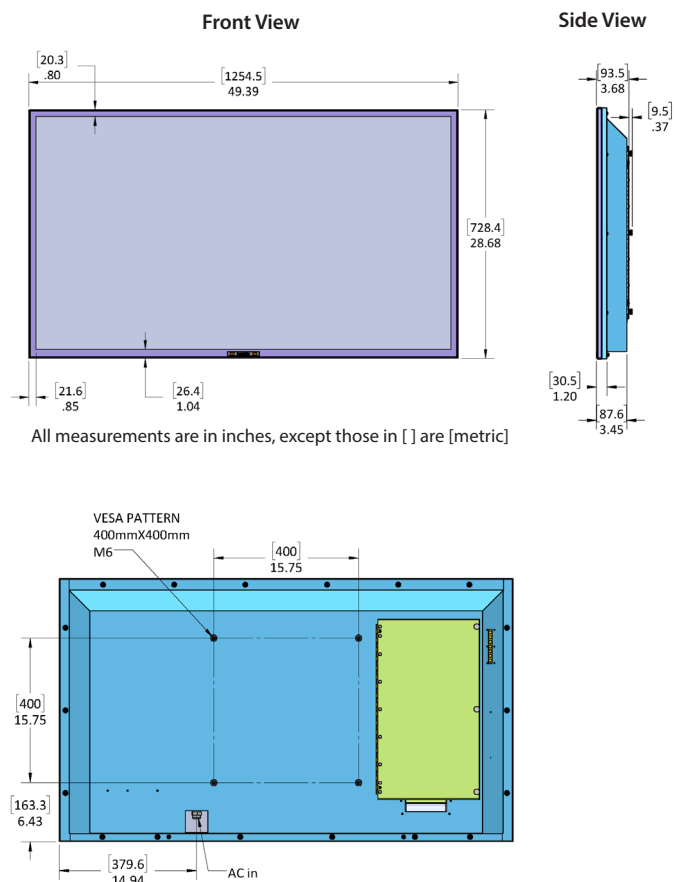


09/17/2018

Specifications are subject to change.


Specifications

SunBriteTV Model SB-V-65-4KHDR

LCD Screen	65-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k HDR
Aspect Ratio	16:9
Blacklight Brightness - Surface Luminance, white	400 nits (cd/m2)
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	8 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x3 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2) (ARC on HDMI2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
RGB	VGA DB15hd (up to 1920 x 1080)
Control Set	Discrete IR Control, Concealed rear IR receiver, IP Control
Audio Out	Tos-Link Optical audio (Fixed) Analog 3.5mm (variable)
Speakers	20 Watt downfiring internal speakers or optional speaker bar (not included)
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (205 watts/1.8a@120v)
Operating Temp.	-24° to 104° F. (0° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery
TV Dimensions	58" W x 33.6" H x 3.5" D 1473mm W x 838mm H x 89mm D
TV Weight	69 lbs.(31.3 kgs)
Shipping Weight	90 lbs. (40.8 kgs)
Residential Warranty	1 year
Commercial Warranty	1 year
Vesa Mount Pattern	400mm x 400mm

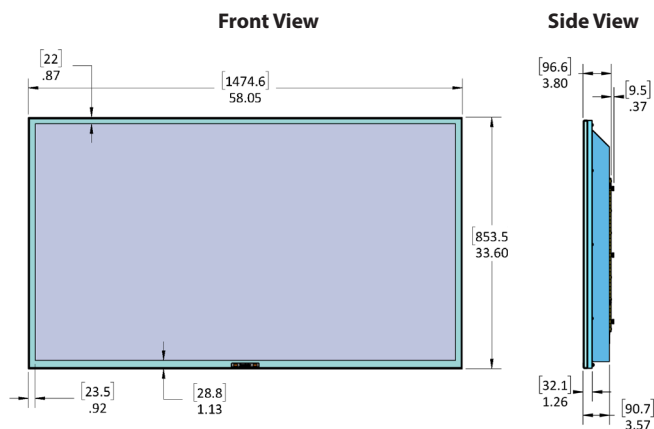



All dimensions are in inches, dimensions in [] are [metric]

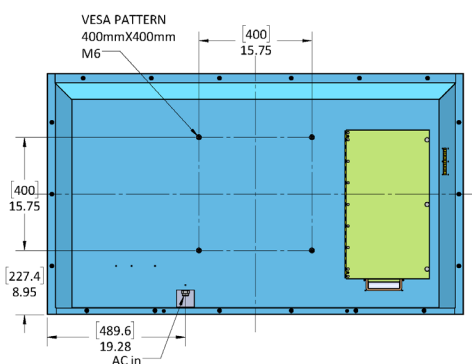

Specifications

SunBriteTV Model SB-V-75-4KHDR

LCD Screen	75-inch diagonal Color Active Matrix TFT LED LCD
Resolution	3840 x 2160 UHD 4k HDR
Aspect Ratio	16:9
Backlight Brightness - Surface Luminance, white	400 nits (cd/m2)
Contrast Ratio	4000:1
Frame Rate	60hz
H/V Viewing Angle	178° by 178°
Response Time	8 milliseconds
TV formats	2160p*, 1080p, 1080i, 720p, 720i, 480p, 480i * using HDMI only
Input Connectors:	
RF	Antenna/CATV (NTSC/ATSC/QAM) x1
HDMI	HDMI Input x3 (Supports HDMI 1.4, HDMI 2.0, HDCP 1.4 & HDCP 2.2) (ARC on HDMI2)
Video Composite	Composite Video x1, L/R Audio Inputs x1
Video Component	YPbPr plus Stereo Audio x1
RGB	VGA DB15hd (up to 1920 x 1080)
Control Set	Discrete IR Control, Concealed rear IR receiver, IP Control
Audio Out	Tos-Link Optical audio (Fixed) Analog 3.5mm (variable)
Speakers	20 Watt downfiring internal speakers or optional speaker bar (not included)
Exterior	Powder-coated aluminum
Colors	Black only
Input Power	100-240 VAC, 50-60 Hz 2.8A Max (266 watts/2.3a@120v)
Operating Temp.	-24° to 104° F. (0° to 40° C.)
Non-op. Temp.	-24° to 140° F. (-31° to 60° C.)
Accessories Included	Weatherproof remote control with battery
TV Dimensions	66.8" W x 38.7" H x 3.3" D 1698mm W x 984mm H x 85mm D
TV Weight	96 lbs.(43.5 kgs)
Shipping Weight	
Residential Warranty	1 year
Commercial Warranty	1 year
Vesa Mount Pattern	400mm x 400mm

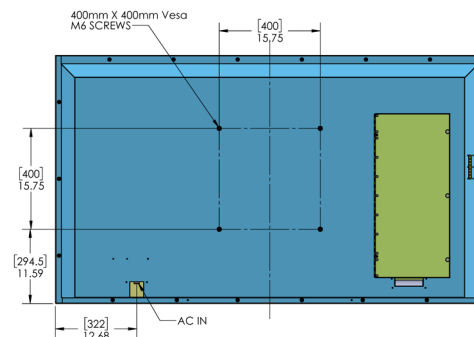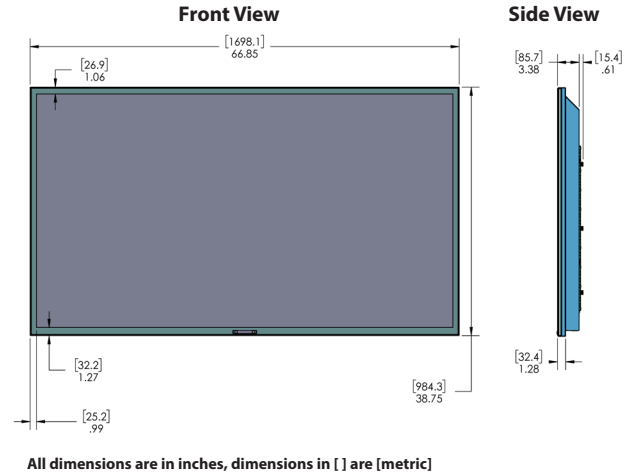

09/17/2018

Specifications are subject to change.