



DoorBird
Technology meets Design.



D2101KH

IP VIDEO DOOR STATION

For single-family houses and commercial buildings with 1 unit
Keypad Module • Info Module • 1 Call Button

Designed,
developed and
made in Germany



DoorBird
Technology meets Design.



D2101KH

IP VIDEO DOOR STATION

For single-family houses and commercial buildings with 1 unit
Keypad Module • Info Module • 1 Call Button

Designed,
developed and
made in Germany

ANSWER YOUR DOOR ANYWHERE.



HOW DOES IT WORK

Imagine, you are not at home and your children have locked themselves out or the courier delivers a package. With DoorBird this is no longer a problem. Each time someone rings the doorbell you get a push notification on your smartphone or tablet. You can then not only talk to the visitor but also see him in HD quality. You will never miss a visitor again. With DoorBird you are on the go and still at home, even if a burglar presses the doorbell to check if someone is at home.

SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your door entrance. The IP Video Door Station can be used as a stand-alone unit or can be integrated into an existing Smart-Home platform. Even existing classic installations such as a door chime or an electric door and gate opener can still be used and controlled via the App.

QUALITY MADE IN GERMANY

DoorBird is designed, developed and produced in Berlin, Germany. DoorBird's "Made in Germany" is not only a motto but a philosophy. All DoorBird IP Video Door Stations are manufactured and tested in Berlin to guarantee the highest quality, longevity and customer satisfaction.

ADVANTAGES



Open API

- Local interface for the integration with third-party systems and SIP



Video and audio call

- On smartphones and tablets (iOS, Android) or landline phones (SIP)



Smart Transmission Mode (STM)

- Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G




Smart Home & ONVIF compatible

- Control4, Loxone, Crestron, Synology, QNAP, AVM FRITZ!fon, URC, RTI, ELAN, Fibaro, Bang & Olufsen and others



- RFID card „abc“ has only admission on Wednesday from 9 am until 11 am
- 4D motion sensor switches on external lamp between 9 pm and 6 am

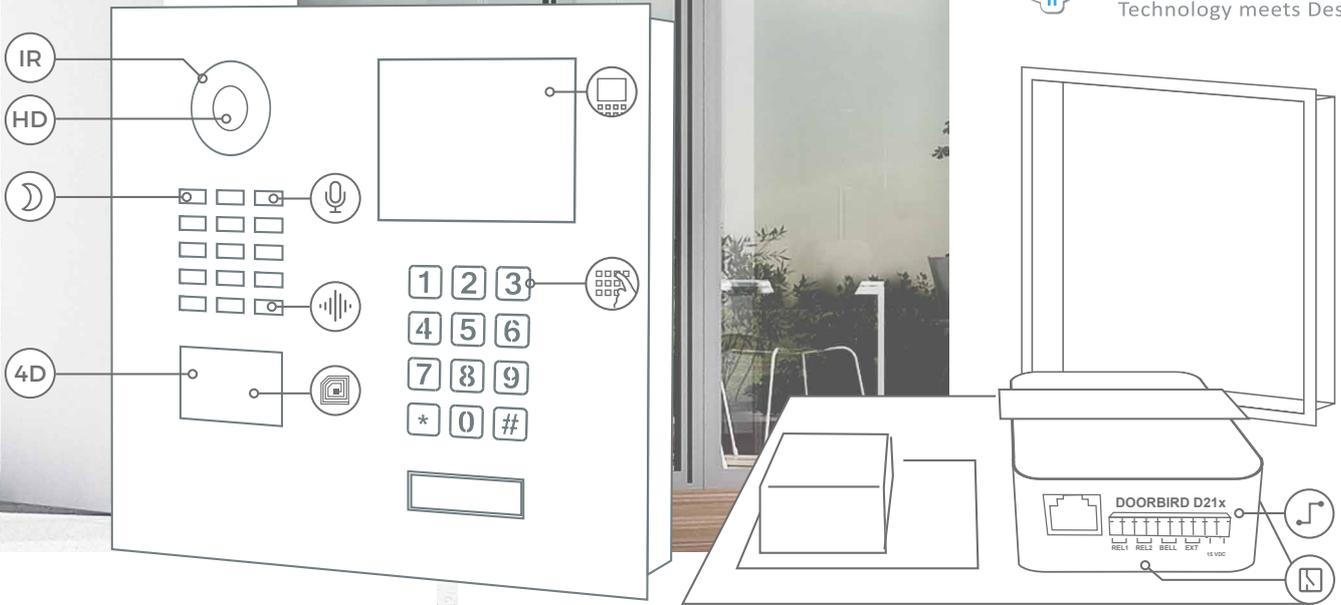

Automatic door opener

- For use in medical offices and office environments



Free cloud recording

- Can be optionally activated for visitor history



Geofencing

- Automatic door and gate opening when returning home



Burglary prevention

- Prevents more break-ins than an alarm system



Receive packages at any time

- Direct the delivery man e.g. to the neighbor or open the garage door via smartphone



Night vision

- With 12 IR LEDs



Light sensor

- For night vision mode



Motion sensor with 4D technology

- Distance up to 10 m adjustable via App (interval: 1 m)



HDTV Video

- Ultra-wide-angle, hemispheric lens, 180°



Echo and noise suppression (AEC, ANR)



RFID card reader

- Configurable remotely via App (e. g. schedules)



Call button

- With backlit nameplate



Info Module

- Illuminated Info Module e.g. to display the house number
- Optionally with stainless steel engravable panels



Keypad Module

- Configurable via App
- Individual PIN Codes
- Individual events (e.g.: a relay switch, push notification, ...)



Easy connection to the network

- Connection via RJ45 socket or bell wire via 2-wire transformer (PoE, network data)



Two freely configurable bi-stable switching relays

- Control two doors or gates via App
- Status configurable via App: Temporary or permanent circuit

GENERAL

Front panel	3 mm (0.12 in) Available in brushed stainless steel V2A / V4A and with Bronze-Finish, V4A
Mounting housing (backbox)	Stainless steel
Mounting type	Flush-mounted, surface-mounting housing sold separately
Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)
Call button	Stainless Steel, Bell symbol, engraved through material for illumination, self-adhesive. Engravable metal nameplate sold separately, see www.doorbird.com/buy
Info Module	3.5", illuminated
Keypad Module	12 keys, illuminated, configurable via App, e.g. <ul style="list-style-type: none"> Individual PIN codes Individual events (e.g. switch a relay, HTTP(s) request) Individual schedules Up to 100 PIN codes manageable
Weight	3043 g
Connectors	<ul style="list-style-type: none"> RJ45, for LAN/PoE Bi-stable latching relay #1, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener Bi-stable latching relay #2, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener Switch relays, max. 1-24 V DC / V AC, 1 ampere, e.g. for conventional door chimes External input for external door opener button (potential-free) 15 V DC input (+, -), max. 15 W Relays can be expanded / detached with DoorBird I/O Door Controller
Weather-proof	Yes, IP65
Approvals	CE, IC, FCC, RoHS, IP65, IK08
Dimensions	256 x 275,25 x 48,75 mm (H x W x D) 10,08 x 10,13 x 1,92 in (H x W x D)
Operating conditions	-25 to +55°C / -13 to 131°F Humidity 10 to 85 % RH (non-condensing)
Scope of delivery	<ul style="list-style-type: none"> 1x Main Electrical Unit 1x Front panel 1x Illuminated Info Module 1x Engravable panel for info module, stainless steel 1x Nameplate for 1 call button, stainless steel, bell symbol 1x Nameplate for 1 call button, plastic, transparent 1x Flush-mounting housing (backbox) 1x Power supply unit (mains adaptor) with four country-specific outlet adaptors (110 - 240 V AC to 15 V DC) 1x RFID key fob 1x Screwdriver 1x Quickstart guide with Digital Passport 1x Installation manual 1x Small parts
Warranty	see www.doorbird.com/warranty

CURRENT SYSTEM REQUIREMENTS

System requirements	Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet
---------------------	---

Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or proxy server
Network: Ethernet Network, with DHCP

Recommended installation height

Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.

VIDEO

Camera	HDTV 720p, dynamic (VGA - HDTV)
Lens	High-end ultra wide-angle hemispheric lens 180° horizontal, 90° vertical, straightened, IR-capable
Night vision	Yes, light sensor, automatic IR-cut filter, 12 IR-LEDs (850 nm)

AUDIO

Audio components	Speaker and microphone, echo and noise cancellation (AEC, ANR)
Audio streaming	Two-way, full duplex

NETWORK

Ethernet	RJ45 jack, PoE 802.3af Mode-A, 10/100 Base-T
----------	--

MOTION SENSOR

Type	Active
Detection angle	54° horizontal, 70° vertical
Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.
Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)
Configuration	<p>Via App, e.g.</p> <ul style="list-style-type: none"> Range (1 - 10 m / 3.3 - 32.9 ft) Movement direction (coming, leaving, both) Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) Individual schedules

RFID

Type	Active Reader Passive Tag (ARPT) system
Standard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102
Frequency	125 KHz
Range	0 - 3 cm, depends on environment
Antenna	Internal
Compatible Transponder	RFID key fobs, sold separately, see www.doorbird.com/buy
	Up to 100 tags manageable
Configuration	<p>Via App, e.g.</p> <ul style="list-style-type: none"> Tag (add, delete) Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) Individual schedules

INTEGRATED WIRELESS MODULES

RFID	125 KHz
Sensor	24 GHz, can be disabled


OPTIONAL ACCESSORIES

Sold separately	see www.doorbird.com/buy
-----------------	--


Special remarks:

Assembly requires professional skills or a technician.


Front panel material thickness: 3.0 mm (0.12 in)

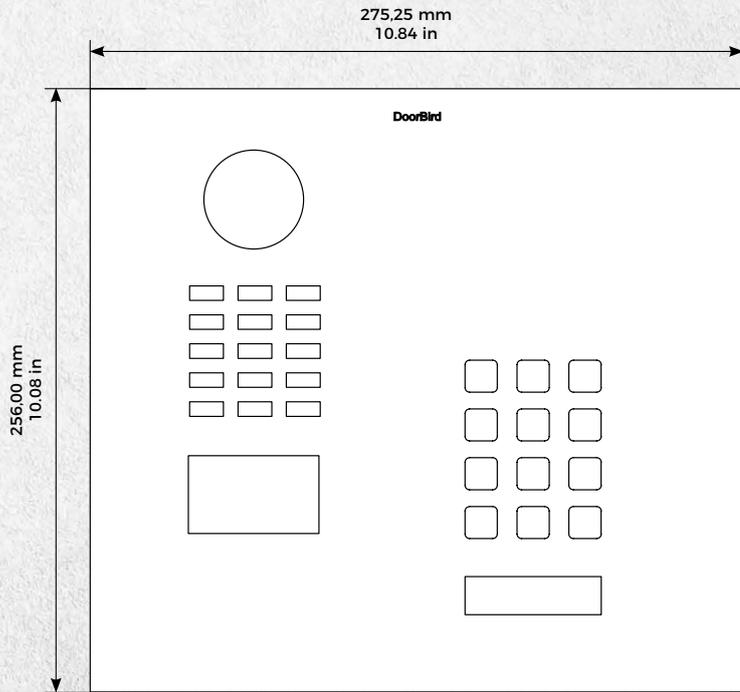


Frontpanel

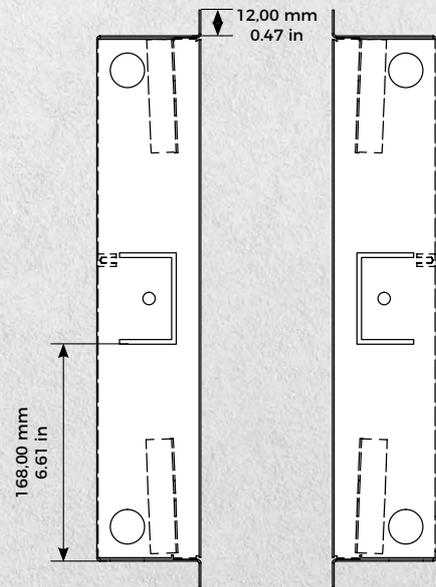

Flush-mounting housing (backbox)

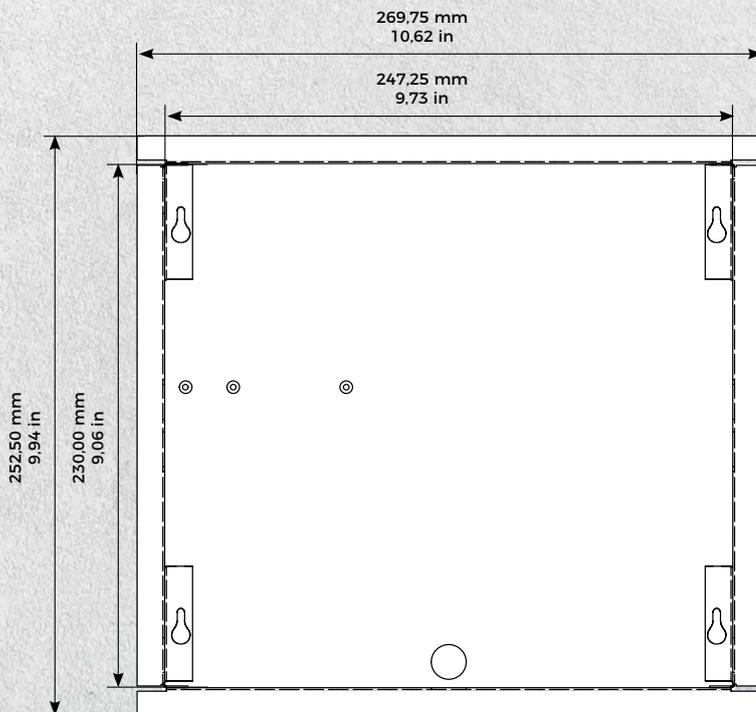

Flush-mounting housing (backbox)

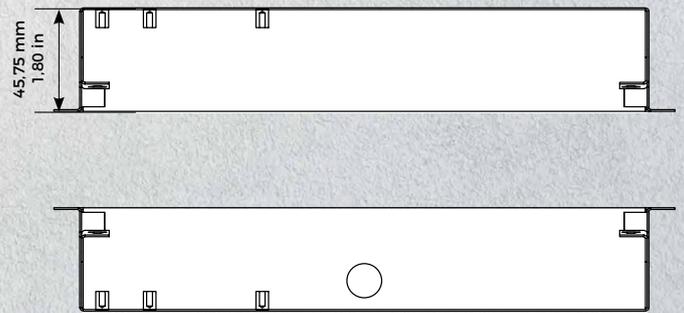

Flush-mounting housing (backbox)