


INSTALL


Rear Enclosures (For Signature Speakers Only)

1. Remove the speaker interconnect cover.

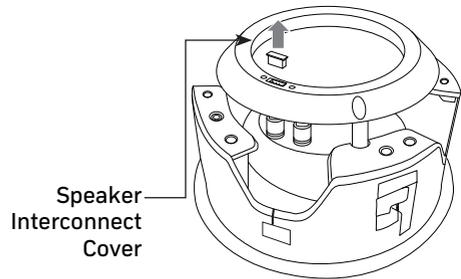

2. Attach the speaker to the appropriate enclosure before mounting.

3. Use the embossed guide to align the enclosure with the product label.

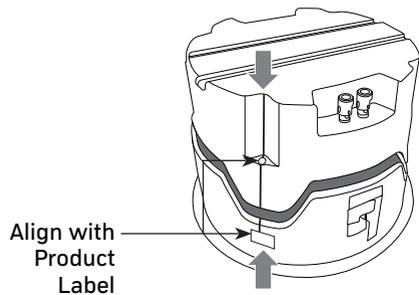

4. Secure enclosure to speaker using the screws provided.

Note: In-wall models include additional screws around the magnet of the speaker.

5. Connect wires to the terminals on top of the enclosure.

