




SM-VP-10x12-BLK

Strong™ VersaPlate

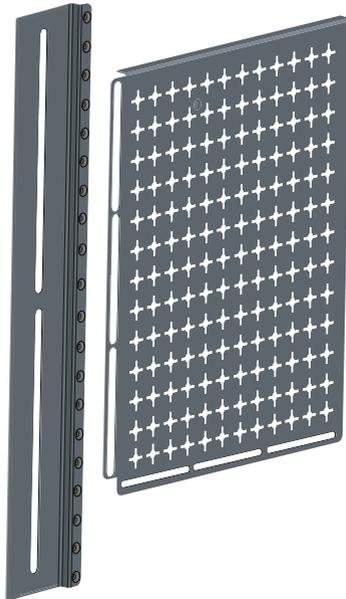

INSTALLATION MANUAL



WARNING

- We highly recommend this product be installed by a qualified professional.
- The manufacturer does not accept responsibility for incorrect installation.
- Read and understand instructions before beginning installation.

SPECIFICATIONS


- VersaPlate Bracket: Maximum VESA of 400mm
- VersaPlate: 10"x12"

BOX CONTENTS

- VersaPlate Bracket (1)
- VersaPlate (1)
- Mount Plate Foot (2)
- Phillips Screws (3)
- Double-sided Adhesive (2)



VersaPlate Bracket (1)

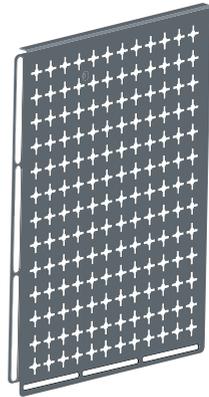

VersaPlate (1)

INSTALLATION

Attach VersaPlate Bracket to Display

1. Lay the display face-down on a soft surface.
2. Place the **VersaPlate bracket** on the back of the display, and align the bracket slot with the display's VESA pattern holes.

NOTE: The **VersaPlate** can be mounted almost anywhere on the rear of the display. Try different locations to find what works best. (Figure 1)

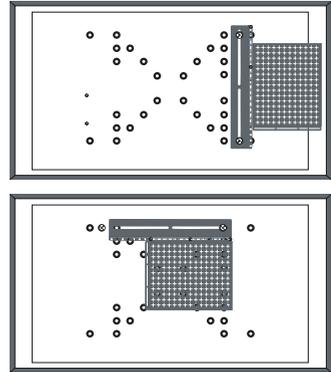


Figure 1

3. Place the display **mounting arm** on top of the **VersaPlate bracket**. (Figure 2)
4. Align the **mounting arm** and the **VersaPlate bracket** slots and tighten down to the display's VESA pattern.

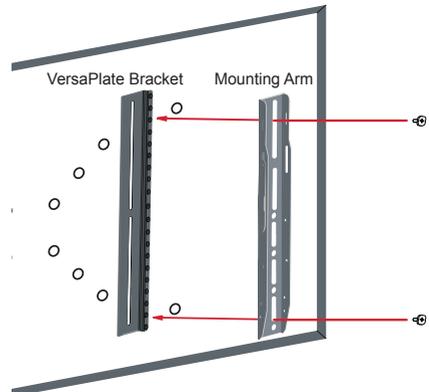


Figure 2

Attach Versa Plate to Bracket

1. Lay the **VersaPlate** flat, arrange equipment on the plate, and secure in place with preferred material.
2. Attach the **VersaPlate** to the **VersaPlate bracket** using a hand screwdriver to secure the screws. (Figure 3)
3. Add adhesive to the end of the **mount plate foot**.
4. Place the **mount plate foot** under the **VersaPlate bracket** and secure it to the display in the desired location.
5. Secure the **mount plate foot** in place with **nut**.
6. Clip the excess length of the **mount plate foot**.

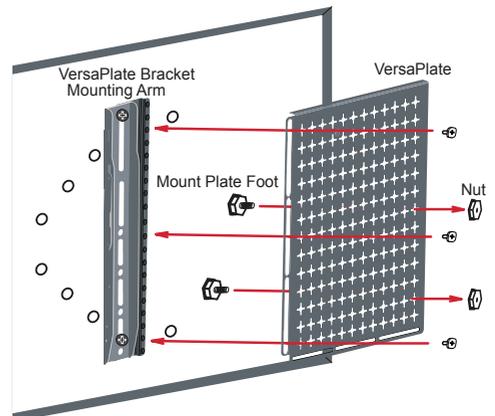


Figure 3

CONTACTING TECHNICAL SUPPORT

Phone: (866) 838-5052

Email: techsupport@snapav.com

LIFETIME LIMITED WARRANTY



Strong™ Mounts have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified, or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization (RA) number.