




KRAMER

BCLS-21

CAT 6 U/UTP 23AWG 600MHz Bulk Cable –
Low Smoke & Halogen Free

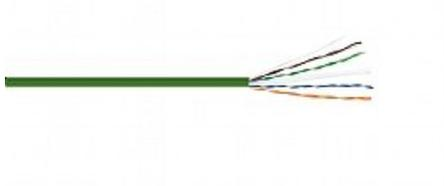

Kramer's BCLS-21 is a high-performance CAT 6 U/UTP cable designed for IT, LAN and Ethernet installations. It is constructed with four pairs of 23AWG solid bare copper conductors with a cross filler. It is enclosed in an LSZH jacket with internal rip cord and sequential markings every meter and packed in a Reelex II carton for easy to pull-out. BCLS-21 cable exceeds CAT 6 specifications to provide additional performance and bandwidth beyond the basic standard

FEATURES

- High-Performance Transmission
- High-Quality Safety Properties
- Sweep Frequency up to 600MHz
- Length - Available in Reelex Cartons of 305m (1000ft)



TECHNICAL SPECIFICATIONS

CONSTRUCTION	<p>Conductor: 4 pairs of 23AWG solid bare copper</p> <p>Insulation: Polyolefin (PO); blue & white/blue stripe, orange & white/orange stripe, green & white/green stripe, brown & white/brown stripe</p> <p>Twist: Left-hand</p> <p>Assembly: Left hand direction</p> <p>Rip Cord: Polyester multi-yarn</p> <p>Jacket: Low smoke zero halogen (LSZH), green (Pantone 363C)</p>
Filler:	Polyolefin (PO)
DIAMETERS	<p>Jacket: Diameter: $6.0 \pm 0.2\text{mm}$; thickness: $0.50 \pm 0.05\text{mm}$</p> <p>Insulation: Blue & white/blue stripe: $0.97 \pm 0.02\text{mm}$ Orange & white/orange stripe: $0.93 \pm 0.02\text{mm}$ Green & white/green stripe: $0.96 \pm 0.02\text{mm}$ Brown & white/brown stripe: $0.93 \pm 0.02\text{mm}$</p>
ELECTRICAL	<p>Temperature & Voltage Rating: 60°C @300V</p> <p>Spark Test: 2.5kV DC</p> <p>AC Leakage Current: $\leq 10\text{mA}$ (1.5kV AC) through overall jacket</p> <p>Conductor DC Resistance: $\leq 9.38\Omega$ /100m</p> <p>Resistance Unbalance: $\leq 5\%$</p> <p>Dielectric Strength: 1.5kV AC for 2sec</p> <p>Insulation Resistance: $\geq 5000\text{M}\Omega$ /m</p> <p>Mutual Capacitance: $\leq 5.6\text{nF}$ /100m</p> <p>Capacitance Unbalance: $\leq 330\text{pF}$ /100m pair-to-ground</p> <p>Characteristic Impedance: $100 \pm 15\Omega$ @1~100MHz</p> <p>Coupling Attenuation: $\leq 55\text{dB}$ @30MHz, $\leq 47\text{dB}$ @250MHz</p>
USAGE AND ENVIRONMENTAL	<p>Cable Cold Bend: -20°C for 4hr</p> <p>Insulation Tensile Strength: 2400 PSI min. ($1.69\text{kg}/\text{m}^2$)</p> <p>NVP 69%</p> <p>Temperature Range: Storage & shipping: -20°C to 60°C; installation: -0°C to 60°C; operation: -20°C to 60°C</p> <p>Minimum Bending Radius: ≥ 4 times of overall diameter</p> <p>Maximum Pulling Tension: $\leq 110\text{N}$</p>
REGULATORY PERFORMANCE	<p>ANSI/TIA-568-C.2 (2009): Balanced Twisted-Pair Telecommunications Cabling and Components Standards</p> <p>ISO/IEC 11801 (Edition 2.2): Information technology – Generic cabling for customer premises</p> <p>IEC 61156-5 (Edition 2.0): Multicore and symmetrical pair/quad cables for digital communications – Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1000 MHz – Horizontal floor wiring – Sectional specification</p>

REGULATORY
SAFETY

EN 50288-6-1:2013: Multi-element metallic cables used in analogue and digital communication and control – Part 6-1: Sectional specification for unshielded cables characterized up to 250MHz – Horizontal and building backbone cables

EN 50173-1:2011: Information technology – Generic cabling systems – Part 1: General requirements

IEC 60332-1-2: Tests on electric and optical fiber cables under fire conditions – Part 1-2: Test for vertical flame propagation for a single insulated wire or cable – Procedure for 1kW pre-mixed flame

IEC 61034-1 / 61034-2: Measurement of smoke density of cables burning under defined conditions

IEC 60754-2 Test on gases evolved during combustion of materials from cables

EU Directive 2011/65/EC (RoHS 2)

EU Directive 2006/95/EC (LVD)

CE compliance date: 2010.01.01



KRAMER

CONFIGURATIONS

BCLS-21GR-3

CAT 6 U/UTP LSZH Cable - Green
