

CM-DC3 Flashing Tips



Using Vehicle-Specific Firmware

FOLLOW THESE STEPS TO FLASH YOUR DC3 REMOTE START MODULE.




STEP 1:

Visit <https://compustar.idatalink.com>. If using your smartphone, you CANNOT use the standard Weblink Mobile app. Please download the **WeblinkRS** app.



STEP 2:

Use the ADS Weblink cable to connect your DC3 module to your computer or smartphone via the 4-pin **BLACK** port.

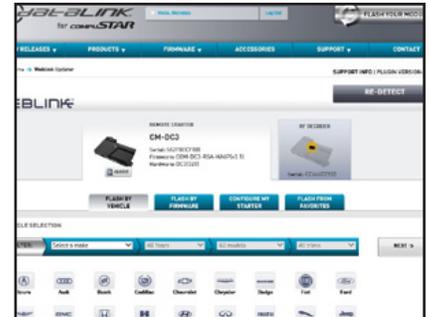

STEP 3:

Once connected, the site/app should recognize the DC3 module. Choose your vehicle to flash the firmware.



STEP 4:

Make sure the “loop” on the side of module is cut. If the module is learned to the vehicle prior to being cut, the module will need to be reprogrammed.



STEP 5:

Once the module is fully programmed and/or learned to the vehicle, connect the Compustar remote antenna to the DC3 module via the **BLUE** antenna port.

FINAL STEPS

- ✓ Learn the DC3 control module to the vehicle.
- ✓ Program tach. (Required on vehicles that provide tach through data or hardwired)
- ✓ Program remotes. Note: system must be unlocked/disarmed prior to entering programming mode.

